
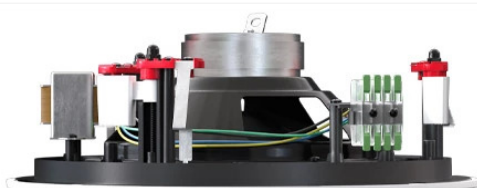


PA SYSTEM / SPEAKERS / CEILING

SKY-8T

8" CEILING LOUDSPEAKER WITH 100 V LINE TRANSFORMER

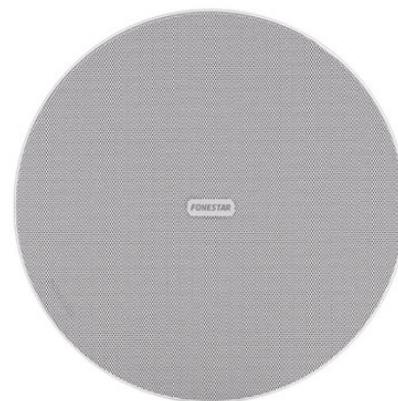

IP44


 SALT MIST
RESISTANCE

 3-POINT
ANCHORAGE


ANTI-DROP SYSTEM


 TAP-LOCK
TERMINALS

 TURN-LOCKABLE
GRILLE

- ✓ Low profile aluminium grille
- ✓ Highly conductive quick-connect terminals
- ✓ Anti-fall system for installation assistance
- ✓ 8" double cone speaker. 20/10/5 W RMS@100 V



+ Info:
<https://fonestar.com/SKY-8T>

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels



All sectors

DESCRIPTION

Ceiling loudspeaker SKY-8T: sound quality with innovative design

The SKY-8T ceiling loudspeaker combines a discreet and elegant design with advanced technical features, offering a professional solution for indoor and outdoor sound installations. With a 100 V line transformer, a frameless grille and a robust construction, this loudspeaker guarantees exceptional performance in commercial, industrial and residential applications.

Exceptional sound performance with versatility and durability

Power and sound quality: The SKY-8T features 20 W RMS power and an 8" dual-cone loudspeaker providing an accurate frequency response from 40 to 15,000 Hz. Its 88 dB sensitivity ensures powerful and clear acoustics, even in large spaces.

Resistance and durability: Made of corrosion-resistant materials such as aluminium grille and UV-protected ABS, this loudspeaker is designed to withstand harsh environmental conditions. IP-44 rated, it is dust and water resistant, ideal for wet or outdoor environments.

Easy integration: The frameless, removable grille can be painted to match any décor, while quick-connect terminals make wiring easy.

Why choose SKY-8T?

Efficient and safe installation: Includes safety hooks, fall arrest system and wormdrive ceiling brackets for quick and stable mounting.

Multi-system compatibility: Its 100 V line transformer and the possibility to operate at different impedances make it ideal for various professional sound setups.

Discreet and customisable design: With a low profile and removable grille, the SKY-8T combines functionality with aesthetics, easily adapting to any architectural environment.

The SKY-8T is the perfect choice for installers looking for a professional, robust and technically outstanding ceiling loudspeaker for demanding sound projects.



+ Info:

<https://fonestar.com/SKY-8T>

TECHNICAL CHARACTERISTICS

FEATURES	<p>Ceiling loudspeaker with 100 V line transformer.</p> <p>Low profile frameless grille, constructed from rust resistant aluminium. Detachable, turn-lockable grille. The logo can be removed and painted.</p> <p>Fast connection terminals and high conductivity.</p> <p>Anti-fall system for installation assistance.</p> <p>Hook for safety cable.</p> <p>Stable, worm-gear ceiling brackets.</p> <p>Protection against dust and water.</p>
POWER	<p>20 W RMS</p> <p>27 W MAX.</p>
SPEAKER	8" polypropylene double cone diaphragm
RESPONSE	<p>40-15,000 Hz @ -10 dB</p> <p>90-15,000 Hz @ -3 dB</p>
IMPEDANCE	<p>20 W RMS@100 V (500 Ohm)</p> <p>10 W RMS@100 V (1,000 Ohm)</p> <p>5 W RMS@100 V (2,000 Ohm)</p>
SENSITIVITY	88 dB @ 1 W/1 m
SOUND PRESSURE	<p>103 dB @ max. W/1m Continuous</p> <p>105 dB @ max. W/1m Peak</p>
COVERAGE ANGLE:	H/V (-6 dB): 70°@500Hz, 90°@1kHz, 70°@2kHz, 50°@4kHz
PROTECTIONS	<p>IP-44 in compliance with IEC 60529</p> <p>EN ISO 9227:2006 Neutral Salt Spray Test</p>
MATERIAL	<p>ABS (UV resistant)</p> <p>Liquid painted aluminium grille</p>
CONNECTORS	<p>Highly conductive quick-connect terminals</p> <p>For cable cross-section 0.4 ~ 4 mm².</p>
OPERATION TEMPERATURE	-20°C ~ 70°C (48 h)
STORAGE TEMPERATURE	10°C ~ 40°C
MAXIMUM HUMIDITY	95%
COLOUR	White (RAL 9003)
DIMENSIONS	<p>Total loudspeaker: 306 mm Ø x 114 mm height</p> <p>Grille section: 7 mm</p> <p>Recessed height: 107 mm</p> <p>Installation hole: 273 mm Ø</p> <p>Maximum ceiling thickness: 30 mm</p>
WEIGHT	1.7 kg
ACCESSORIES	Installation template



+ Info:

<https://fonestar.com/SKY-8T>