


ARIES SERIES LED CABINETS

Rental


Brighten Every Moment

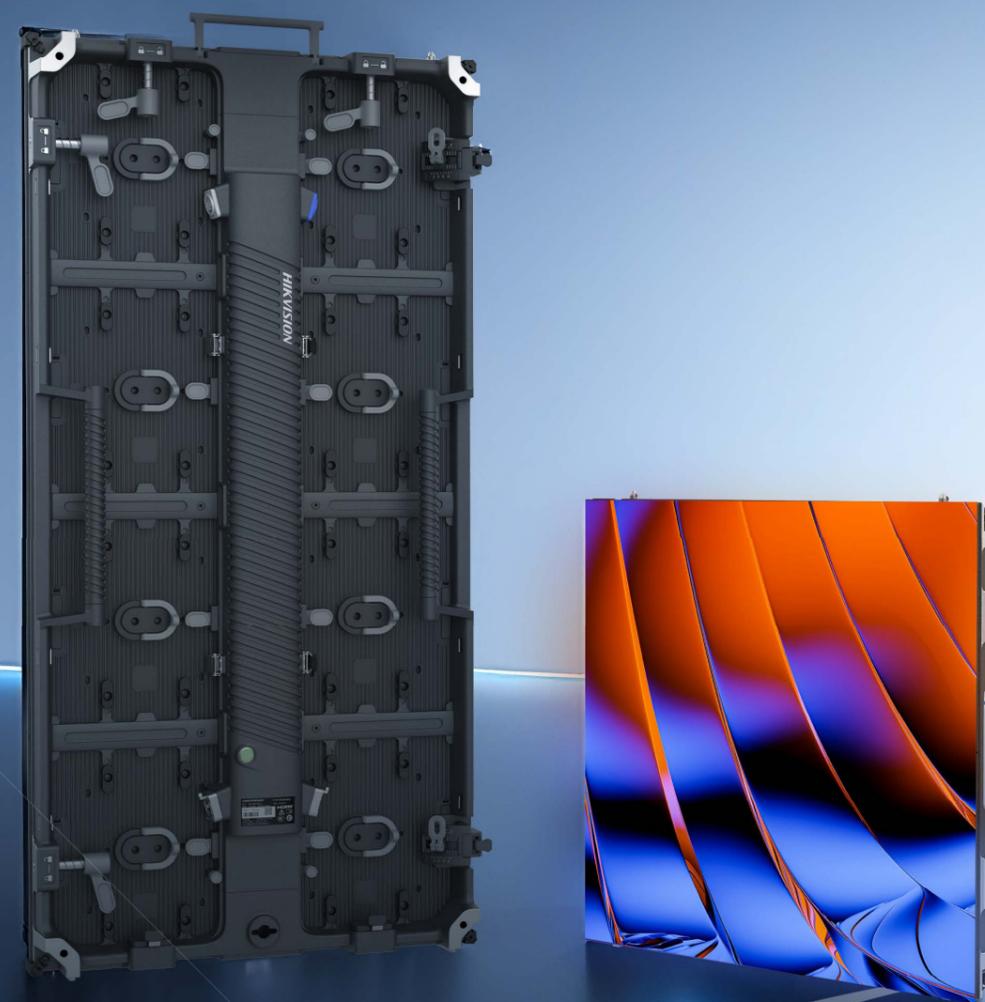

Two Cabinet Sizes



500x500 mm Cabinet

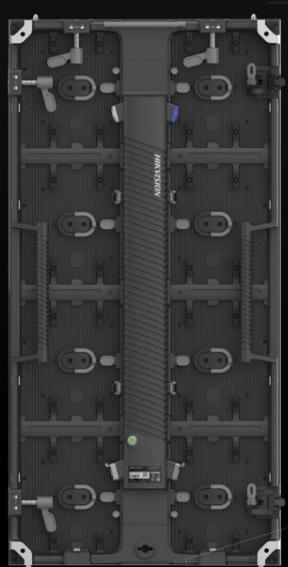

500x1000 mm Cabinet

Ultra-Slim & Lightweight

69mm





69mm



500x1000 mm <11kg
500x500 mm <7kg
**Incl. LED modules*

Unified Platform for Flexibility

Compatible with modules of varying pixel pitches, enabling flexible adjustments and improving cost efficiency

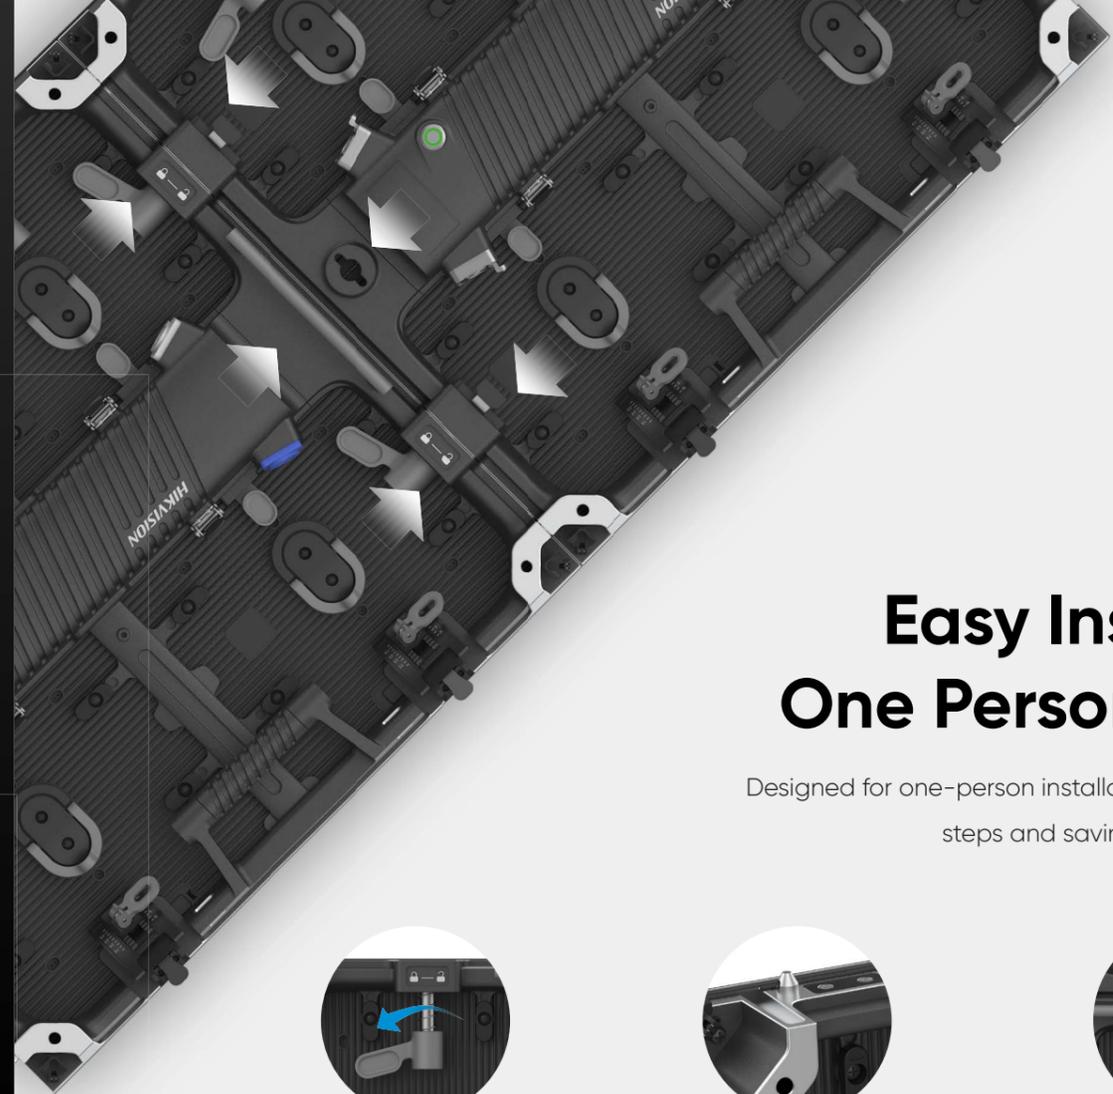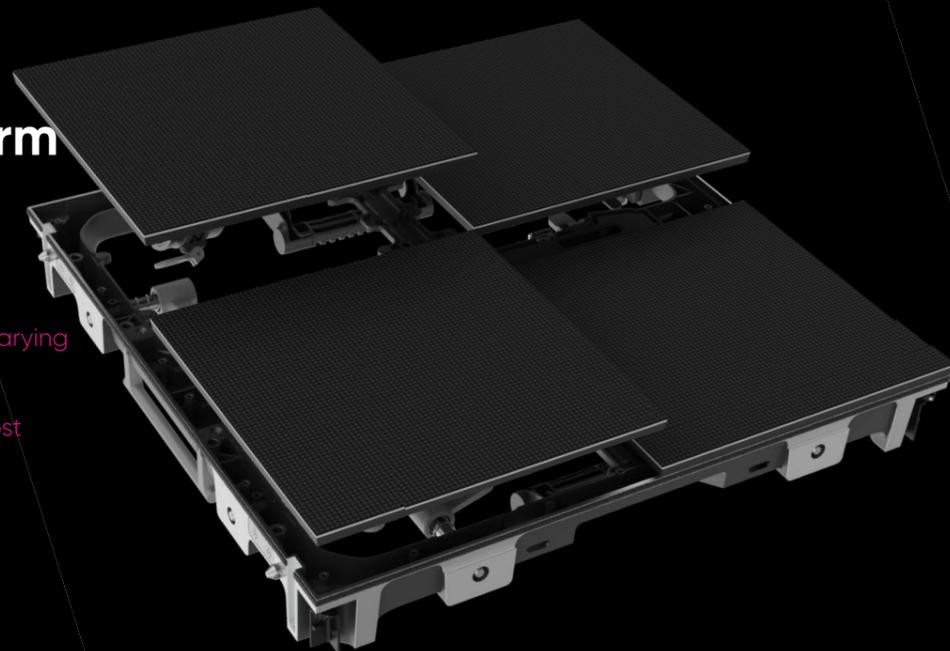

Easy Installation One Person Enough

Designed for one-person installation, eliminating complex steps and saving up to 1/3 of labor costs



One Push
to lock and reinforce



One Touch
to secure the latch




One Click
to release the center pin




Magnetic top and bottom edges (optional)
Automatically align, improving installation efficiency

Quick Fixes Anytime Anywhere

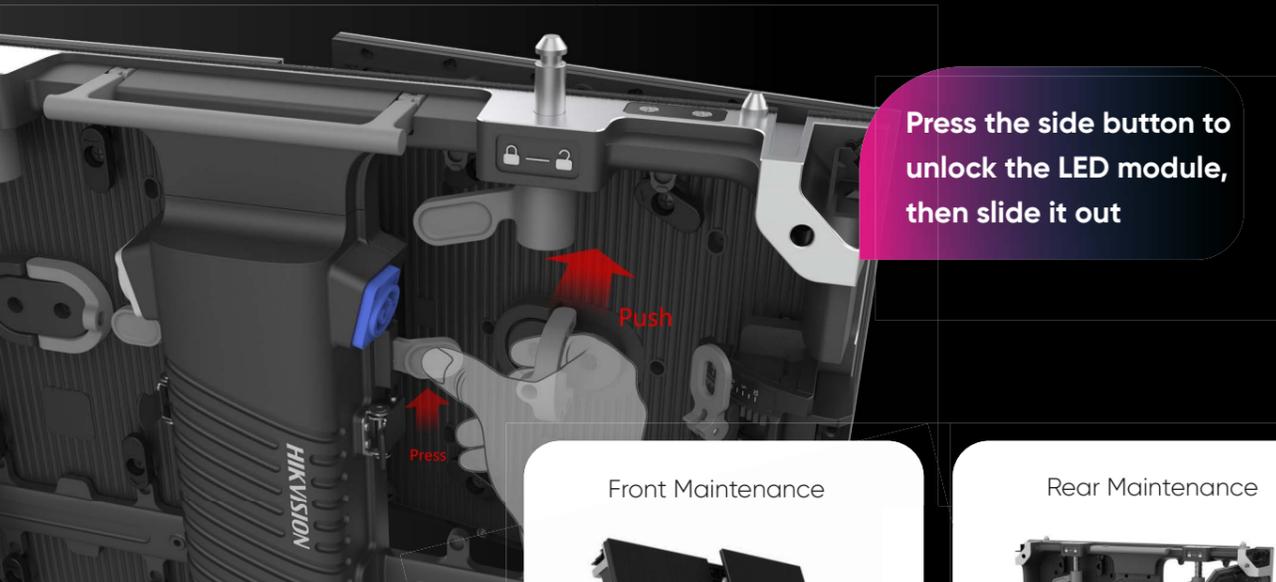


Press the side button to unlock the LED module, then slide it out

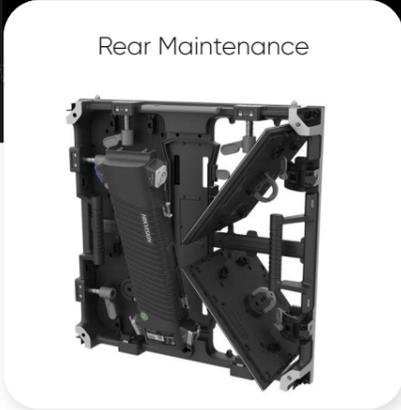


Front and Rear Maintenance for Continuous Protection >>>

Built to Last Resistant to Wear

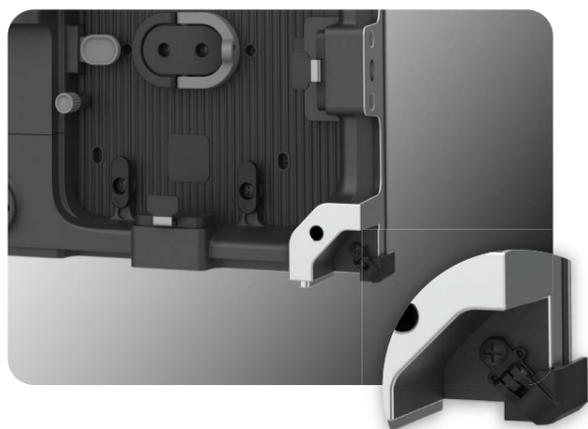

Anti-collision – Flip-over corner guards protect the LED module from impacts during transport

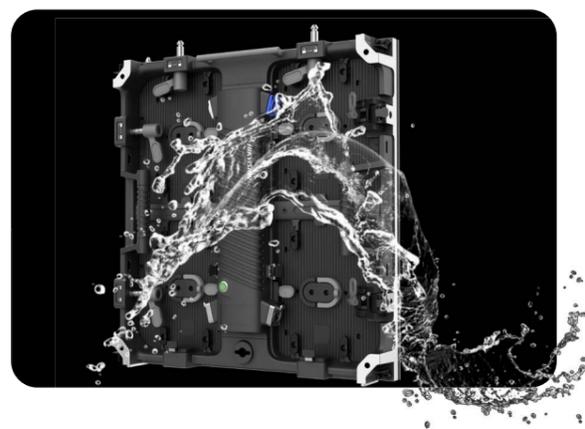

Water-proof – IP40 indoor, IP65 outdoor, perfect for all environmental conditions

True-to-Life Colors within Reach



7680 Hz


High refresh rates of 7680 with no visible scan lines in photos or videos

14 bit

Grayscale depth of 14 bit (customizable to 16 bit) for crisp, clear images with rich detail



95%



Over 95% of the DCI-P3 Color Gamut, delivering cinema-grade color accuracy and vibrant, lifelike visuals


4500 nits

Indoor brightness of 1000 nits, outdoor brightness of 4500 nits (customizable to 4500 nits for black SMD)

Seamless Splicing for Unlimited Creativity

Mixed Splicing

500x500 mm and 500x1000 mm cabinets with the same pixel pitch can be combined to meet diverse size needs

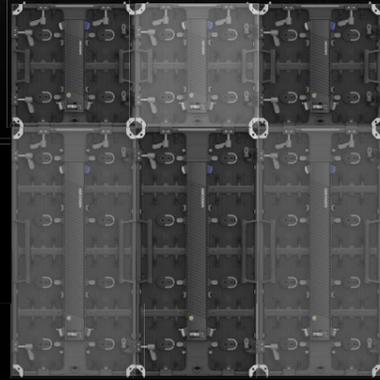

Beyond Flat Curves at Your Command

10° Inward Curve →


← 10° Outward Curve



Arc Splicing

The rotating arc lock allows customizable angles for both inward and outward curves, up to 10° each

Application Scenarios

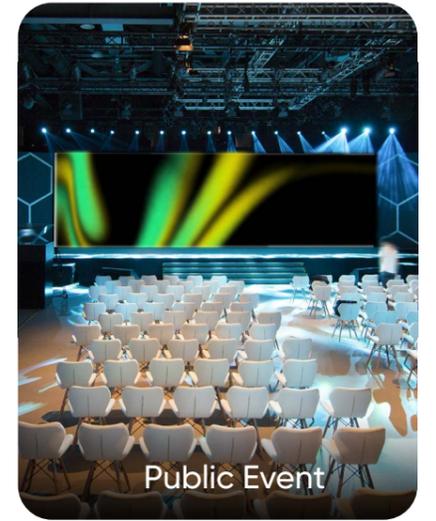

Key Spec

Product Model	P2.6 INDOOR	P2.9 INDOOR	P3.9 INDOOR	P2.9 OUTDOOR	P3.9 OUTDOOR
Application Scenarios	Indoor			Outdoor	
Pixel Pitch (mm)	2.604	2.971	3.91	2.971	3.91
Module Resolution	96x96	84X84	64X64	84X84	64X64
Module Size (mm)	250X250X16				
Cabinet Size (mm)	500X500X69	500X500X69, 500X1000X69			
Brightness (nits)	1,000			4,500	
Contrast Ratio	6,000:1			4,000:1	
Cabinet Weight (Kg)	< 7			< 11	
Viewing Angle (H/V)	160°/140°				
Refresh Rate (Hz)	7,680				
Operating Temperature	-20~45 C				
IP Rating (front/rear)	IP40			IP65	
Grayscale	≥ 14bit				