
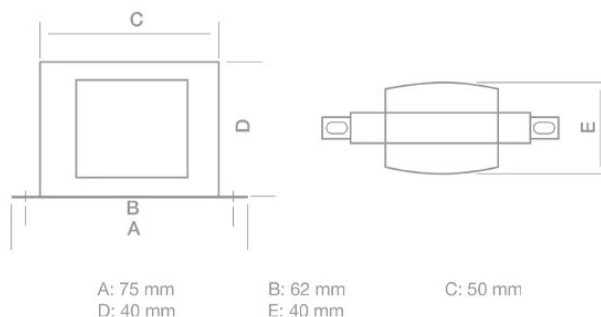
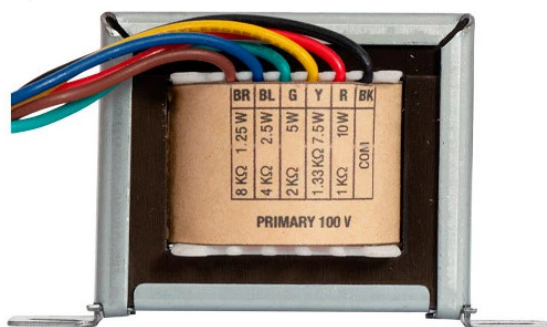


PA SYSTEM / PUBLIC ADDRESS ACCESSORIES / TRANSFORMERS

CV-1910

100 V LINE TRANSFORMERS, FOR LOW IMPEDANCE LOUDSPEAKERS

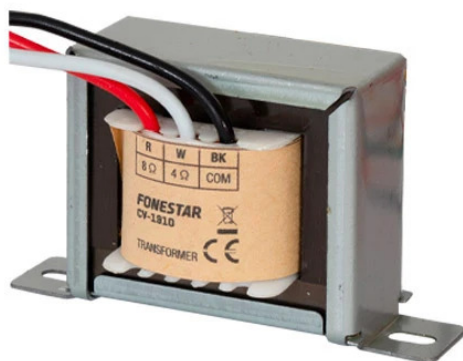

- ✓ Adapts a low-impedance loudspeaker for 100 V line use
- ✓ Spare speaker parts
- ✓ 10 W

ESPECIALLY RECOMMENDED IN:



All sectors


 + Info:
<https://fonestar.com/CV-1910>

DESCRIPTION

100 V line transformers, for low impedance loudspeakers.

TECHNICAL CHARACTERISTICS

POWER	100 V line: 10 W, 7.5 W, 5 W, 2.5 W, 1.25 W
IMPEDANCE	1,000 Ohm, 1,330 Ohm, 2,000 Ohm, 4,000 Ohm, 8,000 Ohm
OUTPUTS	Low Z for 4 Ohm, 8 Ohm speakers
DIMENSIONS	A: 75 mm, B: 62 mm, C: 50 mm, D: 43 mm, E: 40 mm
WEIGHT	0.3 kg
CABLE LENGTH	120 mm



+ Info:
<https://fonestar.com/CV-1910>